

TRI-STAR ★ ★ ★

HEAVY DUTY HOT PLATES



Model# TSHP-4-24



Standard Features

- *Stainless Steel front, sides, landing ledge.
- *35,000 BTU/hr. lift-off burner heads for performance cooking and easy cleaning.
- *Optional 40,000 BTU/hr. burner heads for super high performance cooking and easy cleaning.
- *Anti-clogging pilot shield design engineered into the grate.
- *All burners are equipped with continuous pilots for instant ignition.
- *12" x 12" heavy duty cast-iron section top-grate removes easily and accommodates a full range of cooking utensils for maximum versatility.
- *6" stainless steel landing ledge provides a functional working area.
- *Available in 12", 24", 36", 48" and 60" width models.
- *4" legs and stainless steel stands are available.
- *One year parts and labor warranty.

The Heavy Duty Hot Plates

TSI provides as standard many of the optional upgrades normally offered at a premium on other Hot Plate lines. TSI Features a stainless steel front, sides and landing ledge.

Models ranging from one to ten open burners are available. The lift-off burner heads simplify cleaning and the 35,000 or 40,000 BTU/hr. burner output provides high performance cooking. The heavy duty cast iron grates are designed in 12" x 12" sections to be removed easily and safely. For quick clean-ups, a full width, removable drip pan is standard on all Hot Plate models.

Constructed for durability, TSI Hot Plates are made of heavy gauge steel with an angle iron chassis. The sides have inside liners for better insulation and increased strength.

The front landing ledge of the Hot Plate series is designed to match all TSI counter model units.

HEAVY DUTY HOT PLATES












MODEL #TSHP-4-24

(shown with optional legs)



Heavy Duty Hot Plates

Model #	Hot Plate Top	Total BTU	Approx. Ship Weight (Lbs)	Stand Model#	Approx. Ship Weight (Lbs)
 12" W TSHP-1-12	(1) OPEN BURNER	35,000	50	TSHP-S-1-12	25
 12" W TSHP-2-12	(2) OPEN BURNERS	70,000	85	TSHP-S-2-12	40
 24" W TSHP-2-24	(2) OPEN BURNERS	70,000	85	TSHP-S-2-24	40
 36" W TSHP-3-36	(3) OPEN BURNERS	105,000	120	TSHP-S-3-36	45
 24" W TSHP-4-24	(4) OPEN BURNERS	140,000	150	TSHP-S-4-24	50
 48" W TSHP-4-48	(4) OPEN BURNERS	140,000	150	TSHP-S-4-48	50
 36" W TSHP-6-36	(6) OPEN BURNERS	210,000	220	TSHP-S-6-36	70
 48" W TSHP-8-48	(8) OPEN BURNERS	280,000	280	TSHP-S-8-48	85
 60" W TSHP-10-60	(10) OPEN BURNERS	350,000	340	TSHP-S-10-60	105

Standard Exterior Finish

Stainless Steel: Front, landing ledge and sides.

Control Knobs: Durable, cool to the touch knobs.

Hot Plate Top

Open Burners: 35,000 or 40,000 BTU/hr. cast iron burners with lift-off burner heads. No gaskets, no screws. One standing pilot for each burner for instant ignition.

Burner Grates: 12" x 12" sections lift-off, heavy duty cast iron. Cast-in bowl directs heat upward.

Drip Pan: Full width removable drip pan.

Optional Items

40,000 BTU/hr. burner available upon request.

Stainless steel stand; casters (front two are locking); quick disconnect and flexible gas hose. 4" adjustable legs.


Gas

Manifold pressure is 5.0" W.C. for natural gas or 10.0" for propane gas. Manifold size 3/4" NPT. Specify type of gas and elevation if over 2,000 ft.







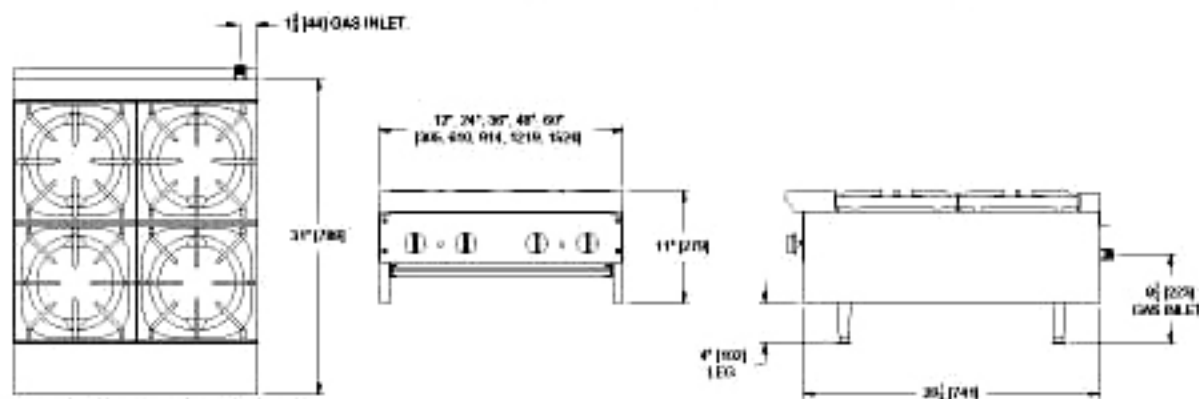


Clearance

For use only on non-combustible surfaces. Legs or stands are required for non-combustible floors. Provide 0" clearance from non-combustible surfaces and 8" from back, 10" from sides from combustible surfaces.

HEAVY DUTY HOT PLATES



Heavy Duty Hot Plates

Model #	Hot Plate Top	Total BTU	Ship Weight (Lbs)	Stand Model#	Ship Weight (Lbs)
 12" W TSHP-1-12	(1) OPEN BURNER	35,000	50	TSHP-S-1-12	25
 12" W TSHP-2-12	(2) OPEN BURNERS	70,000	85	TSHP-S-2-12	40
 24" W TSHP-2-24	(2) OPEN BURNERS	70,000	85	TSHP-S-2-24	40
 36" W TSHP-3-36	(3) OPEN BURNERS	105,000	120	TSHP-S-3-36	45
 24" W TSHP-4-24	(4) OPEN BURNERS	140,000	150	TSHP-S-4-24	50
 48" W TSHP-4-48	(4) OPEN BURNERS	140,000	150	TSHP-S-4-48	50
 36" W TSHP-6-36	(6) OPEN BURNERS	210,000	220	TSHP-S-6-36	70
 48" W TSHP-8-48	(8) OPEN BURNERS	280,000	280	TSHP-S-8-48	85
 60" W TSHP-10-60	(10) OPEN BURNERS	350,000	340	TSHP-S-10-60	105

Standard Exterior Finish

Stainless Steel: Front, landing ledge and sides.

Control Knobs: Durable, cool to the touch knobs.

Hot Plate Top

Open Burners: 35,000 or 40,000 BTU/hr. cast iron burners with lift-off burner heads. No gaskets, no screws. One standing pilot for each burner for instant ignition.

Burner Grates: 12" x 12" sections lift-off, heavy duty cast iron. Cast-in bowl directs heat upward.

Drip Pan: Full width removable drip pan.

Optional Items

40,000 BTU/hr. burner available upon request. Stainless steel stand; casters (front two are locking); quick disconnect and flexible gas hose. 4" adjustable legs.

Gas

Manifold pressure is 5.0" W.C. for natural gas or 10.0" for propane gas. Manifold size 3/4" NPT. Specify type of gas and elevation if over 2,000 ft.

Clearance

For use only on non-combustible surfaces. Legs or stands are required for non-combustible floors. Provide 0" clearance from non-combustible surfaces and 8" from back, 10" from sides from combustible surfaces.

Premium Commercial Equipment

2205 So. Standard Avenue, Santa Ana, CA 92707 Phone:(714)424-9380 Fax:(714)424-9385 Toll Free:(866)782-7462

TSI reserves the right to change materials and specifications without notice.